


Tabela Ciśnień Opony do pojazdów ciężarowych i autobusów 2018

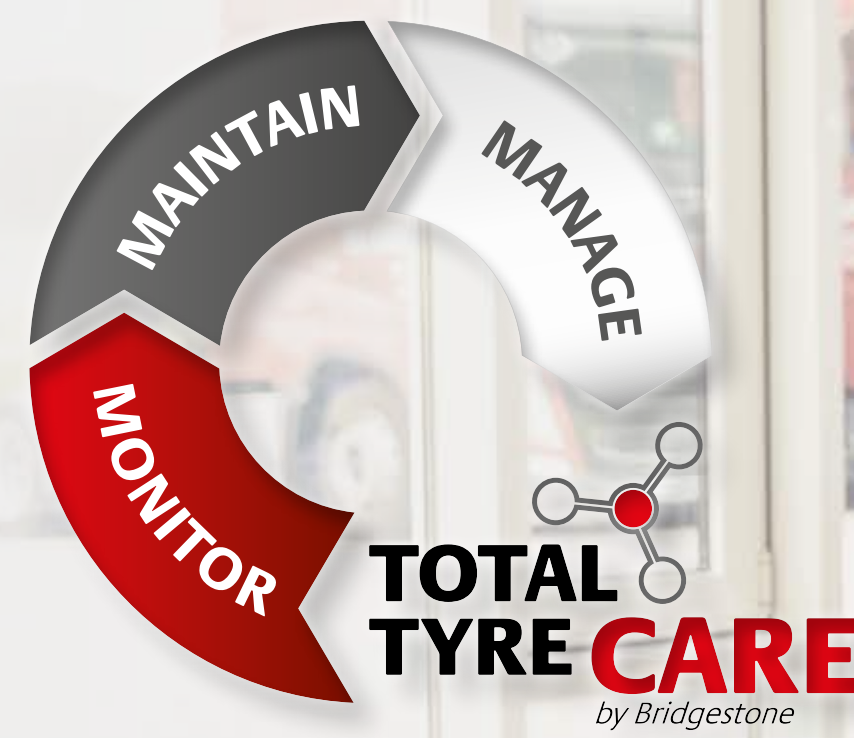

Rozmiar	Indeks nośności	LI	BAR PSI S/D	5.50 80	5.75 84	6.00 87	6.25 90	6.50 94	6.75 98	7.00 102	7.25 106	7.50 109	7.75 112	8.00 116	8.25 120	8.50 123	8.75 127	9.00 131
15"																		
Profil 80																		
205/80 R 15	124/122	124 122	S D	I H			2760 5160	2850 5330	2940 5500	3030 5670	3120 5840	3200 6000						
Profil standardowy																		
7.50 R 15	135/133	135 133	S D	I H								3840 7260	3950 7460	4050 7660	4160 7850	4260 8050	4360 8240	
8.25 R 15	143/141	143 141	S D	I H								4800 9070	4940 9320	5070 9570	5200 9820	5330 10060	5450 10300	

17.5"																		
Profil 65																		
205/65 R 17.5	127/125	127 125	S D	I H							3000 5660	3090 5820	3170 5980	3260 6130	3340 6290	3420 6450	3500 6600	
	132/132	132	D	H						6700	6890	7080	7260	7450	7640	7820	8000	
Profil 70																		
245/70 R 17.5	136/134	136 134	S D	I H							3840 7270	3950 7470	4060 7680	4170 7880	4270 8080	4380 8280	4480 8480	
	143/141	143 141	S D	I H							4560 8620	4690 8870	4820 9110	4950 9350	5080 9590	5200 10070	5330 10300	5450
	144/144	146 141	D D	H H							9370 7590	9640 7830	9910 8060	10170 8290	10430 8510	10690 8740	10950 8960	11200
265/70 R 17.5	138/136	138 136	S D	I H				4000 7590	4130 7830	4250 8060	4370 8290	4490 8510	4610 8740	4720 8960				
Profil 75																		
205/75 R 17.5	124/122	124 122	S D	I H			2770 5190	2860 5360	2950 5520	3030 5680	3120 5840	3200 6000						
215/75 R 17.5	126/124	126 124	S D	I H		3010 5660	3110 5850	3210 6040	3310 6220	3410 6400	3510 6600	3600 6800						
	128/126	128 126	S D	I H			3120 5880	3220 6070	3310 6260	3410 6440	3510 6620	3600 6800						
	135/133	135 133	S D	I H						3740 7060	3840 7260	3950 7460	4050 7660	4160 7850	4260 8050	4360 8240		
225/75 R 17.5	129/127	129 127	S D	I H			3290 6220	3400 6420	3500 6620	3600 6810	3700 7000							
235/75 R 17.5	143/141	143 141	S D	I H						4690 8870	4820 9110	4950 9350	5080 9590	5200 9830	5330 10070	5450 10300		
	132/130	132 130	S D	I H				3480 6610	3590 6810	3690 6940	3800 7010	3900 7210	4000 7600					
	144/144	144	D	H						9430	9680	9940	10200	10450	10700	10960	11200	
Profil standardowy																		
9.5 R 17.5	143/141	143 141	S D	I H						4560 8620	4690 8870	4820 9110	4950 9350	5080 9590	5200 9830	5330 10070	5450 10300	
	129/127	129 127	S D	I H			3200 6050	3300 6250	3410 6440	3510 6630	3610 6820	3700 7000						
10 R 17.5	143/141	143 141	S D	I H						4800 9070	4940 9320	5070 9570	5200 9820	5330 10060	5450 10300			
	134/132	134 132	S D	I H				3600 6780	3710 6990	3820 7190	3920 7400	4030 7600	4140 7800	4240 8000				

19.5"																		
Profil 50																		
435/50 R 19.5	160	160	S	I						7150	7370	7580	7780	7990	8200	8400	8600	9000
Profil 70																		
245/70 R 19.5	136/134	136 134	S D	I H						3930 7440	4050 7650	4160 7860	4270 8070	4380 8280	4480 8480			
	141/140	141 140	S D	I H						4410 8570	4540 8810	4660 9050	4790 9290	4910 9530	5030 9770	5150 10000		
265/70 R 19.5	140/138	140 138	S D	I H			4350 8210	4480 8460	4610 8640	4750 8950	4880 9200	5000 9440						
	143/141	143 141	S D	I H					4670 8820	4800 9070	4940 9320	5070 9570	5200 10060	5330 10300	5450 10300			
285/70 R 19.5	145/143	145 143	S D	I H						5020 9430	5150 9680	5280 9920	5410 10170	5550 10420	5680 10660	5800 10900		
	146/144	146 144	S D	I H						5190 9680	5330 9940	5470 10200	5600 10450	5740 10700	5870 10960	6000 11200		
	150/148	150 148	S D	I H						5800 10890	5950 11180	6100 11470	6250 11760	6410 12040	6560 12320	6700 12600		
305/70 R 19.5	148/145	148 145	S D	I H					5400 9940	5550 10220	5660 10500	5860 10780	6010 11060	6160 11330	6300 11600			
	151/149	151 149	S D	I H					5910 11130	6080 11450	6250 11770	6410 12080	6580 12390	6740 12700	6900 13000			

20"																		
Profil 80																		
365/80 R 20	158 160	158 160	S S	I I						7150 7580	7350 7780	7550 7990	7740 8200	7930 8400	8130 8600	8320 8800	8500 9000	
Profil standardowy																		
8.25 R 20	133/131	133 131	S D	I H		3630 6870	3750 7100	3880 7340	4000 7570	4120 7800								
14.00 R 20	161/156	161 156	S D	I H		7910 13680	8180 14150	8450 14620	8720 15080	8990 15550	9250 16000							

22.5"																		
Profil 45																		
315/45 R 22.5	147/145	147 145	S D	I H								5460 10300	5600 10560	5740 10820	5880 11090	6020 11350	6150 11600	
435/45 R 22.5	162	162	S	I								8430	8650	8870	9080	9290	9500	
455/45 R 22.5	166	166	S	I								9410	9650	9890	10130	10370	10600	
495/45 R 22.5	169	169	S	I								10300	10560	10820	11090	11350	11600	

Rozmiar	Indeks nośności	LI	BAR PSI S/D	5.50 80	5.75 84	6.00 87	6.25 90	6.50 94	6.75 98	7.00 102	7.25 106	7.50 109	7.75 112	8.00 116	8.25 120	8.50 123	8.75 127	9.00 131
Profil 50																		
355/50 R 22.5	156	156	S	I										7100	7290	7470	7650	7830
Profil 55																		
385/55 R 22.5	158 160	158 160	S S	I I					7070	7280	7490	7700	7900	8100	8300	8500		
									7580	7780	7990	8200	8400	8600	8800	9000		

Profil 60																			
295/60 R 22.5	150/147	150	S	I								5640	5800	5950	6100	6250	6410	6560	6700
		147	D	H								10350	10640	10920	11200	11480	11760	12030	12300
		152	S	I								5980	6140	6300	6470	6630	6790	6950	7100
315/60 R 22.5	152/148	148	D	H							10600	10890	11180	11470	11760	12040	12320	12600	
		154	S	I				6310	6490	6660	6830	7000	7170	7340	7500	7670	7840	8000	
		148	D	H				10600	10890	11180	11470	11760	12040	12320	12600				
Profil 65																			
385/65 R 22.5	158	158	S	I				7280	7490	7700	7900	8100	8300	8500	8700	8900	9100	9300	9500
		160	S	I				7580	7780	7990	8200	8400	8600	8800	9000	9200	9400	9600	
		164	S	I				8420	8650	8880	9110	9330	9560	9780	10000				
425/65 R 22.5	165	165	S	I			8780	9040	9290	9550	9800	10050	10300	10550	10800	11050	11300	11550	
445/65 R 22.5	169	169	S	I						10030	10300	10560	10820	11090	11350	11600			